

True Flat & Fan-free F10-15 TOUCH POS SYSTEM

- * Bezel Free Touch Screen
- * Low Power Consumption, High Performance
- * IP54 Water-proof
- * Hard Drive Easy Maintenance
- * MSR, VFD, Multi-display Available
- * VESA 75mm, 100mm, Wall mountable



Innovation Business Intelligence

POS Workstation F10-15

Sinocan unveils the fan-free F10-15 series as a brand new innovative POS terminal. Designed with true flat touch panel and IP65 front bezel, so spill-resistant and anti-dust features allow it to operate calmly even in a smoothly environment. Also, considerate I/O connection design allows device cables to be hidden inside the system base and therefore enhances the cable management. Besides, the F10-15 series supports energy-efficient Intel Atom CPU with 15" touch screen in a robust stand. It also supports versatile peripheral options such as MSR, VFD, 2nd LCD monitor and built-in wireless module, and a wide range of connectivity to meet numerous applications.

Quality and Reliability

- Fan-free design boasting quiet and anti-dust features
- Resistive touch screen: 15" LCD 1024 x 768 resolution
- Spill-resistant design to prevent careless spill and provide easy cleaning for a wide range of applications.

Extreme Productivity

- The energy-efficient Intel Atom N2800 Dual Core 1.86 GHz CPU to lower energy cost

Rich I/O Connectivity

- USB 2.0 x 5 ; RS232 x 3; PS/2 x 1; RJ45 x 1; Line out x 1; MIC x 1
- Mini PCI-e slot x 1; VGA x 1; 12VDC out x 1



MSR, VFD Option



The 2nd Display Option




SPECIFICATIONS

Model	F10-15
LCD Display Size	15.0" 4:3 TFT LCD Panel
Standard Resolution	1024 x 768 @ 75 Hz
LCD Brightness(typical)	250 nits
Viewing angle (typical)	Horizontal: ±80° or 160° total, Vertical: ±80° or 160° total
CPU	Atom N2800 Dual Core 1.86G, Fan-free All-in-One Design
Chipset	Intel NM10 Express chipset
Video	Intel Cedarview N2800 integratedd graphic engine, integrated VGA
Audio	Realtek AC97 Codec Audio, Built-in 2 x 1W Speakers
H.D.D	2.5 Inch SATA 320GB, Easy Maintaince
Memory	1x SO-DIMM Memory Slots, DDRIII 2GB, Supports Up to 4GB Memory
Ethernet LAN Card	Realtek 8111E PCI Bus 10/100/1000M Gigabit Ethernet
I/O Interface	1 x Power Connector (12V DC Jack Out); 1 x Power Connector (4 Pin DC Jack In); 1 x PS/2 for Keyboard ; 2 x Audio (Line Out / MIC) ; 1 x RJ45 (Support 10/100/1000M) ; 5 x USB2.0 (I/O bottom 4 x USB2.0, Left side 1 x USB2.0) ; 3 x Serial (RS232) 1 x VGA Out ; 1 x Mini PCI-E Slots (Internal Slot)
Touch Technology	True Flat 5-Wires Resistive Touch Screen Technology, Life: 10million Touches
OS Support	Windows 7, POSReady 7, Ubuntu 12.04
Power Supply	External Power Adapter, 90W AC: 100-240V, 50/60 Hz; DC: 12V DC, 7.5A
Options	3-Tracks Magnetic Stripe Reader VFD Customer Pole Display 2nd 10.4 or 15 inch Display LCD Monitor Wireless LAN Mini PCI-E Module, Supports 802.11 b/g/n 80mm Receipt Thermal Printer, 300mm/sec high speed
Environment	Operating: 0°C to 40°C (32°F to 104°F) / 20%-80% Storage: -20°C to 60°C (-4°F to 140°F) / 10%-90%
Dimension	365(W) mm x 185(D) mm x 340(H) mm



Model: P12-USL

DIMENSION (Unit: mm)

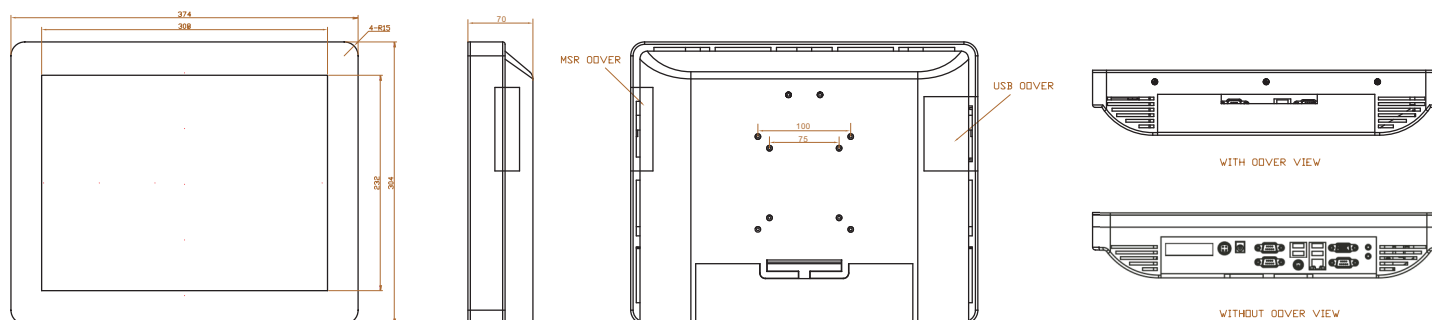

* Sinocan reserves the right to change the specification without prior notice.

Sinocan International Technologies Co., Ltd.

4th Floor, Future Plaza, Overseas Chinese Town,
Nanshan Distr. Shenzhen, China 518053
Factory: A8 Building, Peking University Founder
Shiyan Science Park, Bao'an, Shenzhen, China 518108
Tel: +86-755-2691 5588 Fax: +86-755-8661 2352
Email/MSN: marketing@sinocan.com.cn
Skype: sales.sinocan
Web site: <http://www.sinocan.com.cn>
Global Service Hotline: +86-400-6600060

Sinocan
Business Information Total Solution Provider

