

19" TFT-LCD

T06-19 TOUCH SCREEN MONITOR

Ultra Slim & Stable



The most cost-effective touch solutions for your business
A wide range of connectivity to meet numerous applications.

Touch Monitor T06-19

SinocanT06-19 series touch monitors are designed, developed and built to provide the most cost-effective touch solutions for system integrators and VARs. Aimed at the fast-changing retail POS and hospitality markets, they provide reliable, durable operation and become the worldwide leader in touch monitors. The space-saving T06-19 series features a choice of touch technologies and spill resistant sealing.

Quality and Reliability

- Economical and reliable
- Available with 5-wire resistive technology
- Optional ergonomic 3 stripe MSR
- Optional VFD customer display
- Sealed touchscreen
- Dual RS232/USB interface
- Removable stand and VESA mounting option
- Mounting holes on stand bottom for tabletop security
- Digital on-screen display (OSD)

Innovation and Application

Meets VESA 75mm x 75mm and versatile peripheral options such as MSR, customer pole display, programmable keypad and a wide range of connectivity to meet numerous applications.




SPECIFICATIONS

Model	T06-19
Display	19" TFT-LCD, LED Backlight, 4:3
Touch Technology	5-wires Resistive Touch Panel, Life: 10 Million Touches
Touch Interface	Dual USB & RS232 Interface
OS Support	DOS, Windows 2000/XP/Vista/7 32&64-bit, Linux, iMac etc.
Useful Screen Area	376 mm (H) x 301 mm (V)
Monitor Dimensions (without stand)	431(L)×64(W)×390(H)(mm)
Native (optimal) Resolution	1280 X 1024 @ 60 Hz
Colors	16.7 Million
Brightness(typical)	LCD Panel: 250 nits
Response Time - total (typical)	5 msec
Viewing Angle (typical)	H/V: ±80° or 160° Total
Contrast Ratio (typical)	1000:1
On-screen Display (OSD)	Controls (front): Auto, -, +, Menu, Power Settings: Contrast, Brightness, H/V Position, RGB (color Temp), Clock, Phase, Recall Languages: English, German, Spanish, Japanese, French, Russian, Chinese
Input Video Signal Connector	D-sub 15-pin VGA Type
Audio	2 X Built-in Speakers (*option)
Power Supply	External Power Adaptor 50W; AC: 100~240V, 50/60Hz; DC: +12VDC, 4.17A
Power Consumption (typical)	<45W
Mounting Application	75 mm VESA Mount
Weight	G.W.:7.9Kg
Package Dimension	520(L)×190(W)×520(H)(mm)
Temperature	Operating: 0°C To 40°C (32°F To 104°F), Storage: -20°C To 60°C (-4°F To 140°F)
Humidity(noncondensing)	Operating: 20%-80%, Storage: 10%-90%
Options	3-tracks Magnetic Stripe Reader, KB/USB/Serial Interface Wall Mount Or Ceiling Mount Brackets

* Other model's specs, please visit <http://www.sinocan.com.cn/>
* Sinocan reserves the right to change the specification without prior notice.

DIMENSION (Model:T06-19 Unit: mm)

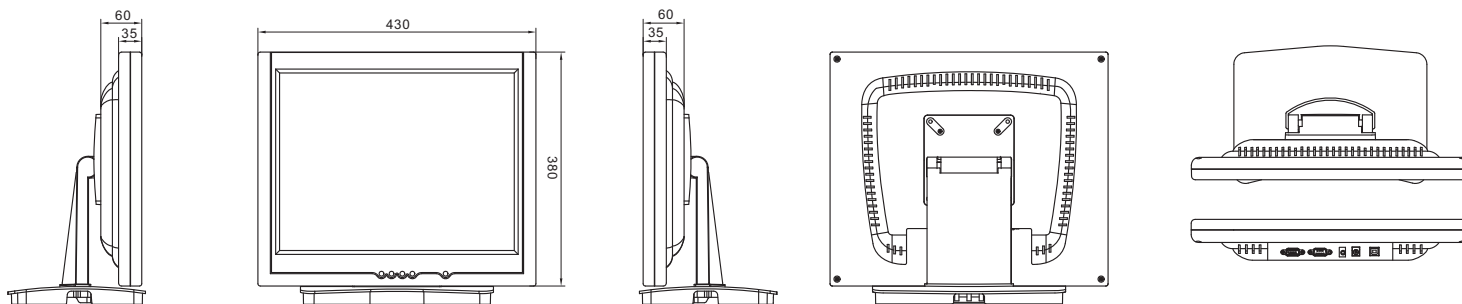

FEATURES




Adjustable



Stand



MSR



Interface

Sinocan International Technologies Co., Ltd.

4F, Xiangnian Square, Overseas Chinese Town,
Nanshan Distr. Shenzhen, China 518053
Factory: A8 Building, Peking University Founder
Shiyan Science Park, Bao'an, Shenzhen, China 518108
Tel: +86-755-2691 5588 Fax: +86-755-8661 2352
Email: info@sinocan.com.cn
Skype: sales.sinocan
Web site: <http://www.sinocan.com.cn>
Global Service Hotline: +86-400-6600060

