

All-In-One PC

Model: F16-J2

Sinocan's F16-J2 as a brand new innovative Touch POS terminal, All-in-One designed with true flat panel, multi-touch technology, considerate I/O connection design allows device cables to be hidden inside the system base and therefore enhances the cable management. The F16-J2 series supports Intel Celeron J1900 processor. It also supports versatile peripheral options such as MSR, VFD, and a wide range of connectivity to meet numerous applications to interface your system with many external devices.


Quality and Reliability

- High quality 15" 4:3 TFT active matrix LCD panel
- Intel celeron J1900, 4 Core 4 Threads 2GHz(up to 2.42 GHz)
- 1x SO-DIMM DDR3L 4GB (Max to 8GB)
- Resolution 1024 x 768, contrast ratio 700:1, brightness 300cd/m2
- Integrate PCT(Projected Capacitive Touch) screen, Multi-touch,10 point
- Stand or Wall Mount Available
- Optional: MSR, VFD
- Supply OEM/ODM service



SPECIFICATIONS

Model	F16-J2
Display	Size: 15" 4:3 TFT LCD Panel Native (optimal) resolution: 1024 X 768 Brightness(typical): 300 nits Viewing Angel: H:160°,V:130°
OS Support	Windows 7/8, POSReady, Linux etc.
Mainboard	CPU: Intel celeron J1900, 4 Core 4 Threads 2GHz(up to 2.42 GHz) H.D.D: 64GB SSD Memory: 1x SO-DIMM DDR3L 4GB (Max to 8GB) Lan Card: 1 x Realtek RTL8111E - Integrated 10/100/1000 Transceiver
Rear Ports	1*Audio-OUT,1*MIC-IN,1*VGA OUT 1*PS/2 ,1*DC-in,2*USB 2.0 3*USB3.0,3*RS232 1*RJ45 ,1*LPT
Touch Technology	PCT screen technology, 10 points Multi-touch
Power Supply	Adapter 12V/7.5A
Temperature	Operating: 0°C to 40°C Storage: -20°C to 60°C
Humidity(noncondensing)	Operating: 20%-90% Storage: 0-90%
Optional	VFD, MSR

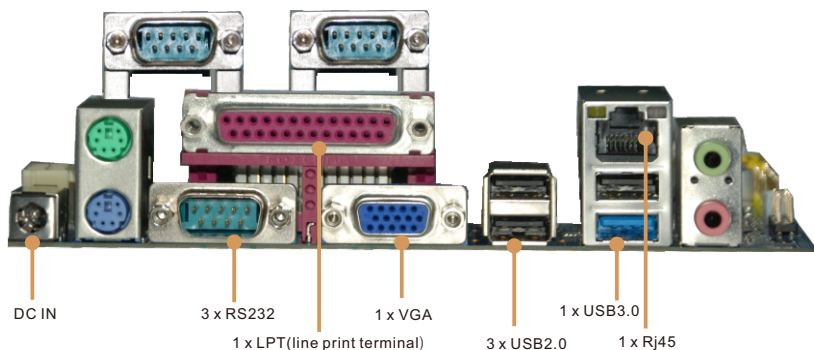

Sinocan International Technologies Co., Ltd.

4th Floor, Future Plaza, Overseas Chinese Town,
Nanshan Distr. Shenzhen, China 518053
Factory: A8 Building, Peking University Founder
Shiyuan Science Park, Bao'an, Shenzhen, China 518108
Tel: +86-755-2691 5588 Fax: +86-755-8661 2352
Email: info@sinocan.com.cn
Skype: sales.sinocan
Web site: http://www.sinocan.com.cn
Global Service Hotline: +86-400-6600060